


INCLUDED PARTS

Haybank Feeder	(4) Brackets
(4) Lag Screws	(16) Fender Washers
(8) 1/4-20 x 3/4 Bolts	(4) Standard Washers
(8) 1/4-20 Lock Nuts	

1. Unpack the Haybank Feeder.
2. Place the Haybank bottom-up on the ground. Locate the holes on the bottom of the feeder. If mounting to a 4x4 post, you will be using the inside and middle 8 holes. If mounting to a 6x6, you will use the outer and middle 8 holes.

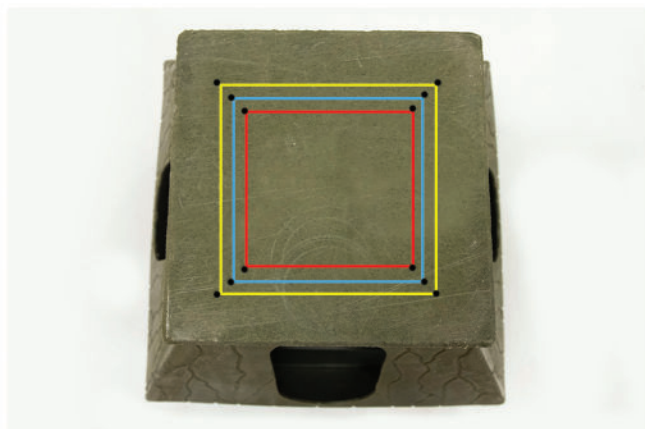

4x4
6x6 and 4x4
6x6

3. Position the brackets so that the long side of the bracket is flat with the feeder. Hand tighten the 4 brackets to the feeder with (8) 1/4-20 x 3/4 Bolts and (8) Fender Washers on the outside and (8) Fender Washers with (8) 1/4-20 Lock Nuts on the inside.



CONTINUED 

4. Flip the Haybank right-side-up and place on your 4x4 or 6x6 post. Slide the brackets as needed to adjust for a tight fit against the post. Attach the feeder to the post using the lag screws and standard washers. Once attached to the post, tighten the bolts on the feeder itself.



5. Insert your square bale into the top of the feeder. Place the cover on top and remove all strings from the bale.

6. Your assembly is complete.

